


*A 6' fume hood consuming 543 CFM in an enclosed support room exceeds the minimum exhaust air requirement and additional air volume is required*

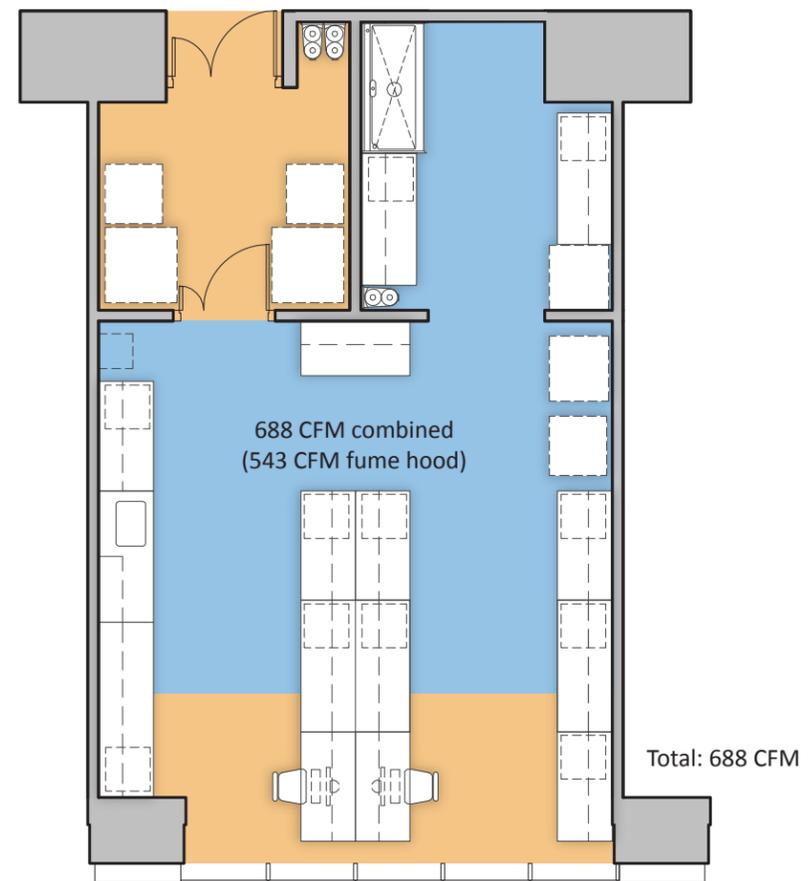

*An unenclosed support room can accommodate the 6' 543 CFM hood without the additional air and energy premium*

= Fume hood exhaust requirement

**FUME HOOD PLACEMENT**